

Versi Pro 07 (GVP 07)

FEATURES



- 1 Each jaw's pivot group stays intact, allowing the use of a press-fit pin design for a stronger, more durable product and making jaw change-outs safe, easy and fast
- 2 Built with Weldox steel for the best combination of structural strength and wear durability
- 3 360° rotation comes standard with every Versi Pro
- 4 The innovative bracket system accommodates a skid steer quick plate or a mini excavator lug plate change-over in 10 minutes
- 5 Electric over hydraulic system allows for jaw open or close and rotation with one hydraulic circuit
- 6 Proprietary regeneration valve improves cycle time by up to 33% compared to standard hydraulic systems
- 7 Jaw change-outs in 10 minutes with the coupler-style connection system



Skid Steer Bracket

Mounting bracket option for skid steers features a traction grip to provide safe entry and exit for the operator



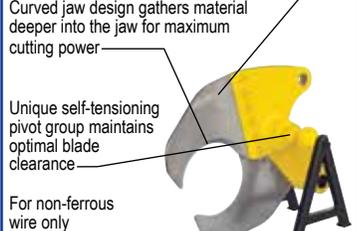


Shear Jaws

Cracker Jaws

Grapple Jaws

Wire Cutter Jaws

<p>Patented pivot geometry creates peak power for piercing and cutting</p> <p>Weld-on wear plate and piercing tip</p> <p>Four-way indexable guide blades and primary blades provide four useable cutting edges</p> 	<p>Patented pivot geometry creates peak power when jaws are fully open, where it's most needed to crush concrete</p>  <p>Open relief design allows concrete to pass through lower jaw</p>	<p>Recessed welds are protected from wear, increasing grapple life</p> <p>Boxed-tine construction creates a very high strength and lightweight grapple – each tine will withstand the full breakout force of the carrier</p> <p>Replaceable tine tips are abrasion-resistant</p> <p>Inside radius matches that of a 55-gallon barrel</p> 	<p>Bolt-on interchangeable cutting blades can be sharpened and are easily replaced</p> <p>Curved jaw design gathers material deeper into the jaw for maximum cutting power</p> <p>Unique self-tensioning pivot group maintains optimal blade clearance</p> <p>For non-ferrous wire only</p> 
--	--	---	---

Model	Weight*	Jaw Opening	Jaw Depth	Reach**	Minimum Excavator Wt.		Minimum Skid Steer Wt.
					Boom Mount (lbs.)	Stick Mount (lbs.)	
Shear Jaws	(lbs.) 1,375	(ins.) 11.5	(ins.) 11.5	w/Jaws Installed (ft. ins.) 5' 6"	12,000	16,000	(lbs.) 7,000
Cracker Jaws	1,385	14.5	13	5' 8"	12,000	16,000	7,000
Grapple Jaws	1,420	32	15.5	5' 11"	12,000	16,000	7,000
Wire Cutter Jaws	1,245	10.5	11.5	5' 9"	12,000	16,000	7,000

* Weight includes mounting bracket to attach to excavator.

** Distance is measured from the attachment mounting pivot (boom or stick) forward.

The stability of each lift class varies between OEM skid steer and mini excavator models. Please consult with your Genesis salesperson for recommended carrier models. Control packages are available for carriers less equipped.