

## Drop-Deck Tilt T-5DT



Positive locking (over-center) latch system keeps deck secured to the frame.



Grommet mounted LED lights are standard.



The "SL" (Scissor Lift) option includes ramps to lower the loading incline.

### Description:

The T-5DT is a pan type tilt-deck trailer designed for hauling small equipment. The deck features white oak wood and 7-inch high sides. The low deck height offers a shallow tilt angle that allows small equipment to easily climb the incline. For scissor lifts, an "SL" option adds ramps for an even lower load angle. The T-5DT features a rubber-ride axle for a smooth ride, electric brakes, an adjustable hitch, and a positive locking (over-center) latch system to safely keep the deck secured to the frame.

### Quick Specs:

- 2" nominal white oak deck
- 16.5" deck height (empty)
- 77" between fenders
- 12' and 14' deck lengths
- Electric brakes
- Dexter<sup>®</sup> Torflex<sup>®</sup> axle
- E-Z Lube hubs
- LED Lights and Sealed Wiring

[towmaster.com](http://towmaster.com)

**800-462-4517**


U.S.A. BUILT  
EMPLOYEE OWNED  
AMERICA'S BEST TRAILER



**GALVANIZING  
AVAILABLE**



Photos may show optional equipment.

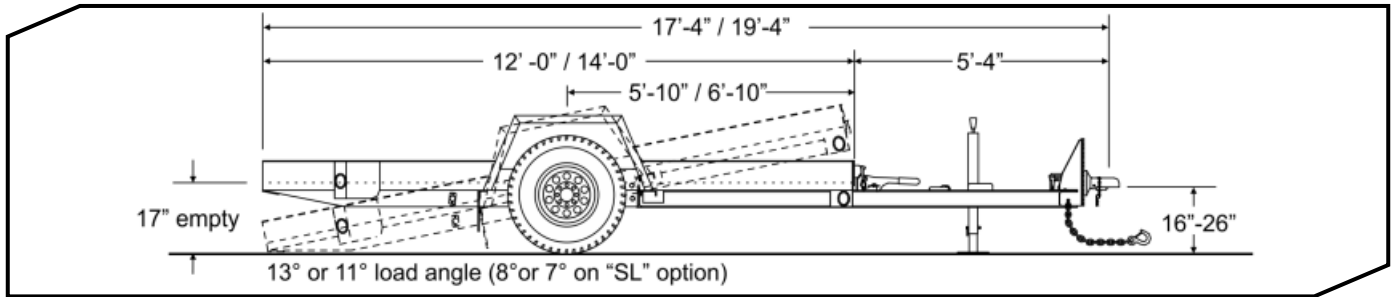

### SPECIFICATIONS

S=Standard O=Optional

T-5DT

#### CAPACITY / DIMENSIONS

Payload Rating (lbs/kg)	6,000 / 2722		
GVWR (lbs/kg)	8,000 / 3629		
GAWR (lbs/kg)	7,000 / 3175		
Approx. Avg. Weight (lbs/kg)	2,000 / 907		
Overall Length (12'-0") (ft-in/mm)	17-4 / 5283		
Overall Length (14'-0") (ft-in/mm)	19-4 / 5893		
Deck Height (empty)(in/mm)	16.5 / 419		
Overall Width (ft-in/mm)	8-6 / 2591		
Load Width (in/mm)	77 / 1956		

#### TONGUE

Tongue Length (ft-in/mm)	5'-4" / 1626		
Pintle Ring (in)	2.5		
Safety Chain	3/8" Grade 43		
Bolt-on Drop-Leg Parking Jack	7K		

#### FRAME / RAMPS

Main Beam	M4 x 13 beam		
Crossmembers	3" Jr I-beam		
Headboard Height (in / mm)	7 / 177		
Deck	Oak Wood		
Deck Lip (in / mm)	7 / 177		
Deck Latch	Single Point		
12 ga. One-piece formed fenders and inner panel	S		
Load Angle (degrees) – depending on deck length	9, 11		
Tie Downs	D-ring		
Number of Tie-Downs (Total / Side)	6 / 3		

#### SUSPENSION / TIRES

Rubber-Ride Axles w/Warranty	S		
Axle Capacity (each) (lbs/kg)	7,000 / 3175		
Axle Spread (in/mm)	N/A		
Hubs	E-Z Lube		
Electric Brakes w/Forward Adjust	S		
Brake Size (in/mm)	12x2 / 305x51		
Battery Break-Away Kit with Tow Charger	S		
Wheels (in/mm)	16x6 / 406x152		
Wheel Bolt Pattern	8-bolt		
Tires / Load Range Rating	235/85R16 / E		

### STANDARD EQUIPMENT

- Adjustable hitch height
- Weather resistant sealed modular wiring
- Grommet mounted LED lights
- Registration holder
- Rust inhibiting primer
- Durable, rust inhibiting top coat
- Die-cut UV resistant vinyl decals
- D.O.T. approved conspicuity tape
- Mud flaps
- RV electrical plug
- Trailer color: Equipment black

### OPTIONAL EQUIPMENT

Other options may be available. Ask your dealer or visit our web site.

- Hydraulic surge brakes
- 3" pintle ring or 2-5/16" ball coupler
- Steel deck
- Deck cushion cylinder
- 6-pole round electrical plug
- Additional tie-downs
- Spare tire and wheel
- Tire upgrade, 235/85R16, 10-ply, load range E tires
- "SL" ramp option for hauling scissor lifts
- Color options: Construction Yellow, Equipment Red, Blue, Charcoal
- Galvanizing

### AMERICA'S BEST TRAILER

U.S.A. DESIGNED AND BUILT IN LITCHFIELD, MN

\*Payload capacity is calculated by taking the GVWR and subtracting the trailer weight.

Listed GVWR, weights, and dimensions are for reference only. Manufacturer reserves the right to change models and specifications as they see fit. See our web site or your local authorized dealer for more information.

Download PDF



www.towmaster.com

800-462-4517

©Towmaster, Inc. 09/2013